

## Tree Risk Assessment

Understanding and addressing the risks associated with trees makes your property safer and reduces potential liability. Trees are an important part of our world. They offer a wide range of benefits to the environment and provide tremendous beauty. However, trees can also be dangerous. Trees and/or parts of trees may fail and cause significant injury to people and/or property damage, so sometimes it's important to assess and manage trees for risk.

**Anyone can assess a tree for risk, the question you must ask yourself is, are they qualified and [appropriately insured](#) to do so?**

RTS performs tree risk assessment in accordance with ANSI A300 (Part 9) - Tree Risk Assessment. Not only because we **must** as [ISA Certified Arborists®](#) who are [Tree Risk Assessment Qualified \(TRAQ\)](#), but also because it ensures consistency by providing a standardized and systematic process for assessing tree risk.

Risk assessment via TRAQ methodology takes one of three levels, depending on the extent of the assessment desired (or needed) by the client.

**Level 1** – This is a limited visual assessment of an individual tree or population of trees. It can be performed as a “drive-by” assessment in the case of many trees or even as a limited assessment as might be performed during an estimating request. RTS typically does **not** charge for this type of risk assessment. However, given its brief nature, a Level 1 assessment often comes with a **high degree of uncertainty**.

**Level 2** – More involved than a Level 1 assessment, this is a 360-degree visual evaluation of a tree where the crown, trunk, root flare, above-ground roots, and site conditions are evaluated with regard to specific targets. It also may involve the use of simple tools (probe, inclinometer, mallet, etc.) and is typically carried out using the ISA Basic Tree Risk Assessment form.

**Level 3** – The most extensive type of assessment, this includes what's done in a Level 2 assessment **and** uses specialized tools and/or techniques. Aerial inspections, [root flare](#) examinations, and/or [decay](#) detection/characterization through **core resistance drilling** (see more below) are typical of this level of assessment.

After the risk assessment has been conducted, RTS works with the client to explain the findings and offer solutions. **We understand that each client is unique and risk tolerance varies.**

Sometimes, removal may be warranted. However, in other cases, the risk can often be lowered to an acceptable level by employing risk mitigation. Often, this may take the form of installing a [supplemental support system](#), [pruning](#), and/or [PHC measures](#) to improve tree strength.

## Core Resistance Drilling

RTS owns a special tool that most other tree companies don't have due to its roughly four thousand dollar cost – a **core resistograph** – specifically an [IML F300](#). Used in Level 3 assessments, the *IML F300* can peer into the hidden, internal state of a tree's core by measuring and recording drill resistance. Having this capability can remove the limitations that often come with simple, visual-based assessments.


## RTS Risk Assessment Form

Client  
Example

Date	3/7/19
Assessor	Stephen Weil
Species	<i>Quercus alba</i>
Condition of Concern Being Evaluated	whole tree failure
Time Frame Evaluated for Likelihood of Failure (months)	12
DBH (inches)	41
Measured Trunk Diameter at Defect (inches)	44
Estimated Bark Thickness at Defect (inches)	1
Estimated Trunk Diameter at Defect (less bark thickness, inches)	42
Measured Decay or Cavity Opening (at widest point, inches)	24
Measured Decay or Cavity Opening (% of trunk circumference)	18.2
Minimum Required Thickness of Sound Wood (% radius) - High Risk Limit*	44
Minimum Required Thickness of Sound Wood (radius, inches)	9.2
Resistograph Serial Number and Calibration Expiration Date	F300-2296, 1/31/20
Sample Height (approximate above grade, inches)	24
Sample Location 1 (estimated minimum thickness of sound wood, inches)	10.8
Sample Location 2 (estimated minimum thickness of sound wood, inches)	10.8
Sample Location 3 (estimated minimum thickness of sound wood, inches)	10.8
Sample Location 4 (estimated minimum thickness of sound wood, inches)	10.8
Sample Location 5 (estimated minimum thickness of sound wood, inches)	10.8
5-Location Average (estimated minimum thickness of sound wood, inches)	10.8
Margin (% above minimum required thickness of sound wood)	16.9
Result (pass/fail)	pass
Recommended Inspection Interval (frequency, months)	12

\*Page 10 of Hayes, E. (2014). *Evaluating Tree Defects*. Rochester, MN: Safetrees, LLC.

## Approximate Sample Locations

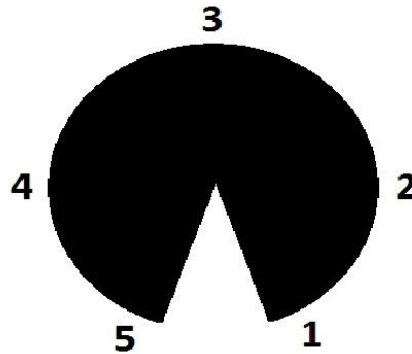

**Defect Not To Scale**



# Tree Risk Management

**Author**

Lindsey Purcell,  
Urban Forestry Specialist,  
Purdue University  
Department of Forestry &  
Natural Resources



PURDUE UNIVERSITY

[www.fnr.purdue.edu](http://www.fnr.purdue.edu)

Trees provide many benefits for our homes, businesses and properties. If a tree is defective, however, it may become a hazard. It is important to understand that tree owners have a duty to inspect and maintain their trees. All property owners should take reasonable steps to protect themselves by involving a qualified consultant or certified arborist.

The primary responsibilities of the arborist are to assess the potential for tree failure, advise owners of the consequences of failure and recommend the proper measures to prevent and abate failures. In assessing and managing trees it is important to create a balance between the inherent risk a tree poses and the benefits provided by the tree. Risk tree management begins with these basic steps:

**Reduce tree liabilities:** The property owner or manager has an obligation to periodically inspect trees for unsafe conditions. Since all trees have risk associated with them, regular inspection compels the owner or manager to evaluate the amount of risk they are willing to assume. Tree risk assessment is an important part of a program to determine if a tree is structurally sound or has the potential for failure. Inspections show that the tree owner is actively managing their trees and could reduce the owner's liability if a failure occurs.



Unhealthy trees can fail, causing potential damage to nearby homes.



**Inspect regularly:** Trees should be assessed through inspections by a qualified arborist, preferably an International Society of Arboriculture Certified Arborist. Further inspections should be conducted after major weather events. At a minimum, trees should be inspected every five years or according to the owner's risk tolerance.

**Document and maintain records:** Every inspection should be recorded and kept on file for future reference. These records are important for several reasons. Past evaluations can show how a tree has changed in its health and structure over the years. Also, written assessments are beneficial in liability claims and court cases. These written evaluations could minimize liability if a failure occurs and a claim is filed against the tree owner.



Inspect trees for health conditions and defects during the tree risk assessment.

**Develop a site policy and care plan:** Every property manager should create and implement a policy for tree risk. This includes developing a standard of care, an inspection process and mitigation of property risk. Routine care and scheduled maintenance for all trees is essential.

**Mitigate tree risk:** Tree owners should make every effort to reduce risk with proper pruning and health care practices. Consider all options before deciding on removal. If possible, move or remove the "target" (see definition in "Tree Risk Assessment" section). Install structural support systems where feasible. Modify site conditions to improve the environment

around the tree. Risk mitigation requires a process of logical options focusing on protecting the target and preserving the tree.

**Schedule tree work:** While evaluating trees for risk, the inspector should note any tree maintenance needs. The inspection can determine the timing and priority of work needed. The work should be prioritized first for safety and then for tree health. Consider potential risk, activities around the tree, level of acceptable risk and the needs of the client.

**Create good tree planting strategies:** Identify planting needs and locations that become available as trees are removed or destroyed. Improving the health and safety of the landscape requires an understanding of management principles, such as species selection and diversity. Also consider the impact of site infrastructure, including utilities, streets and sidewalks, and choose the right tree for the right place. Select trees known to thrive under local conditions and sustainable as long-term investments in the property.

## Tree Risk Assessment

For a tree to be considered hazardous it must be defective either in some part or as a whole, with risk for failure and a target that is threatened. Trees are declared hazards if assessments have been completed and mitigation is required to prevent a failure from causing damage affecting the target. To understand the implications of this concept, tree owners need to know some common terms of tree risk management.

A **target** is people, property or activities that could be injured, damaged or disrupted by a tree failure. Tree owners must carefully assess the area around homes, playgrounds, sidewalks and parking areas. Is the target static, moveable or mobile? Consider whether people can be kept away or separated from the target area. Also, assess the target's value and potential. Review the target zone, which is the area where the tree or a branch is likely to strike when it falls, to determine consequences of the tree's failure. The target zone should include the areas inside a circle around the tree, which is at least as wide as the total tree height.



Identify potential targets for tree failure.

**Risk** is the combination of the likelihood of a tree failure event and the severity of the possible consequences of that event. Every tree has the potential to fail; however, only a small number of failures actually cause injury or damage. It is impossible to maintain trees free of risk. Some level of risk must be accepted by the owner.

**Hazard** is a likely source of harm and is identified as the tree part or parts which will affect the target zone. For example, an entire tree or a single branch could be determined as a hazard. Hazards are identified during tree assessments, and tree owners are required to take steps to minimize the risk of damage from failure.

Individual tree characteristics must be considered when conducting evaluations for defects and failure potential. Evaluations should take a systematic approach, assessing the potential for tree failure, understanding the impact of such failures and outlining a plan of action to prevent and mitigate these failures. Tree owners should fully understand the site factors and characteristics of the tree species. There are several contingencies that influence tree failure potential and risk. These include soil type and saturation, wind exposure, pest damage, poor growing conditions and poor pruning practices such as topping.

Among the characteristics to consider when conducting tree risk evaluations are:


- Defects — severity and location. Decay, cankers, cracks and other positive indicators of weakness in the roots, stems and branches may need immediate attention if a target is present.
- Species characteristics. Some tree species possess weaker wood, a susceptibility to decay, poor growth habits and potential for pests. They could be more likely to fail after wounding because of poor ability to wall off internal decay or health issues.
- Canopy size, shape and weight distribution. This is especially true in situations where a tree is exposed to windy conditions, is leaning or has a poor stem-to-canopy ratio.
- Crown architecture. Poor branching and similar characteristics can create high-risk situations in strong winds and other weather conditions.
- Plant health and vigor. This determines how a tree can overcome wounding or pest infestations.
- The overall size of the defective part. A predetermined rating system, which outlines critical thresholds, should be considered and incorporated into the tree's risk management plan.

## Tree Inspections

Assessments should include a thorough examination of each section of the tree. A systematic approach using standardized evaluation methods aids the process. Review the canopy (crown), branches and root zone to check for signs of failure. These include:

- Dead, diseased, dying or broken branches.
- Thinning or poor canopy health.
- An unstable branching pattern, overextended or weakly attached branches, or cracks in the stems.
- Cracks or decayed areas in the main trunk.
- Exposed or decayed roots, heaving of the soil, fungus growth or cracks in the soil around the root plate.

Recurrent inspections to determine tree health and condition are critical for successful risk management programs. Trees in active-use areas should be inspected annually for defects and conditions leading to failure. Inspections are necessary after storms to ensure excessive loads have not exceeded the strength of the tree and its parts. Also, be sure to note trees with a history of failures or those with problematic structure, for more frequent monitoring and inspection. A good database and archive of tree evaluations is a critical strategy in the overall risk management plan.

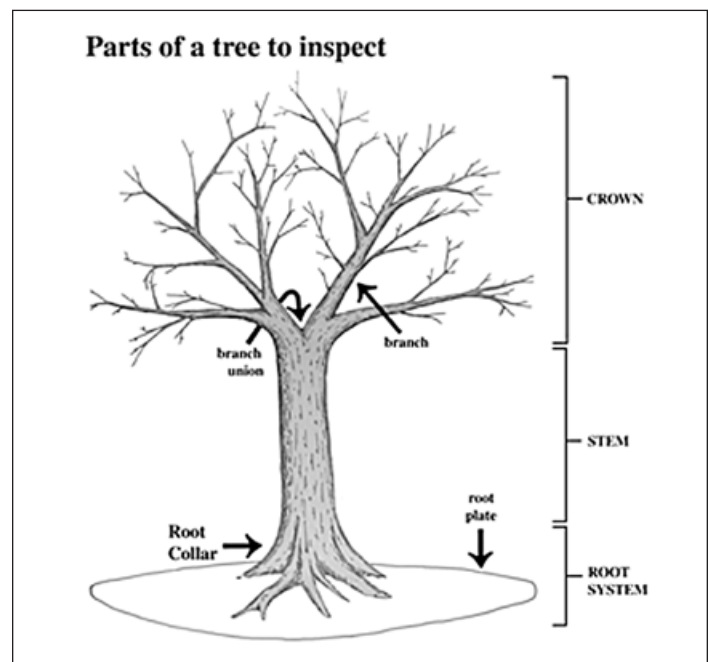

## PURDUE AGRICULTURE

12/12

It is the policy of the Purdue University Cooperative Extension Service that all persons have equal opportunity and access to its educational programs, services, activities, and facilities without regard to race, religion, color, sex, age, national origin or ancestry, marital status, parental status, sexual orientation, disability or status as a veteran.

Purdue University is an Affirmative Action institution. This material may be available in alternative formats.

**PURDUE**  
UNIVERSITY

Purdue Extension  
**Knowledge to Go**  
1-888-EXT-INFO

Order or download materials from  
Purdue Extension • The Education Store  
[www.the-education-store.com](http://www.the-education-store.com)